



# ADJUST QuickStart



gent360-LED & gent360-SERVO timer adjustment



**gent360 LED & gent360 SERVO** come with a preset 5 and 10 second wait between rotation / pictures. Adding this small unit allows continuous adjustment between 5 and 35 seconds.

It is best to add the unit to an already working system.

1. Remove the battery connection from the 6pin end of the **gent360 LED**.
2. Insert **gent360 ADJUST** 3pin plug into the 3pins now free on the **gent360 LED**. Be careful to keep black to -ve and red to +ve.
3. Reconnect the battery to the 3pins on the **gent360 ADJUST**. The pin furthest away from the wires is -VE, the centre pin is +VE.
4. Adjusting the brass screw clockwise increases the period by ~1second per turn, rotate CCW to decrease the time.

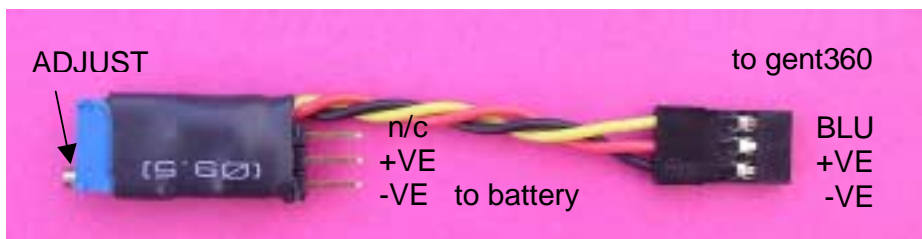

This unit only changes the timing. Small changes in the 30° rotation angle per picture can be achieved by adjusting the trimmer in the pan servo.

**NOTE:** Be careful with the connections! Do not invert the battery!